

CE/EMC TEST REPORT

For
Shenzhenshi yisibei guangdian co.,Ltd

Product Name : LED plant light

Trademark : N/A

Model Number : WS0426

Prepared For : Shenzhenshi yisibei guangdian co.,Ltd

Address : A602 FumanLou,FuyongRoad,FuyongStreet,
BaoanDistrict,Shenzhen,Guangdong,CN

Report No. : LST190720020ER

Testing laboratory : Shenzhen LST Technology Co., Ltd.

Address : Huichao Building, Yintian Industry zone,
Baoan District, Shenzhen, Guangdong P.R. China

TABLE OF CONTENT

Test Report Declaration	Page
1. GENERAL INFORMATION	5
1.1. Description of Device (EUT)	5
1.2. Tested System Details	5
1.3. Test Uncertainty	5
1.4. Test Facility	5
2. TEST INSTRUMENT USED	6
3. CONDUCTED EMISSION AT THE MAINS TERMINALS TEST	8
3.1. Block Diagram Of Test Setup	8
3.2. Test Standard	8
3.3. Power Line Conducted Emission Limit	8
3.4. EUT Configuration on Test	8
3.5. Operating Condition of EUT	8
3.6. Test Procedure	9
3.7. Test Result	9
4. MAGNETIC EMISSION TEST	12
4.1. Block Diagram Of Test Setup	12
4.2. Test Standard	12
4.3. Power Line Conducted Emission Limit	12
4.4. EUT Configuration on Test	12
4.5. Operating Condition of EUT	12
4.6. Test Procedure	13
4.7. Test Result	13
5. RADIATION EMISSION TEST	17
5.1. Block Diagram of Test Setup	17
5.2. Test Standard	17
5.3. Radiation Limit	17
5.4. EUT Configuration on Test	17
5.5. Operating Condition of EUT	18
5.6. Test Procedure	18
5.7. Test Result	18
6. HARMONIC CURRENT EMISSION TEST	21
6.1. Block Diagram of Test Setup	21
6.2. Test Standard	21
6.3. Operating Condition of EUT	21
6.4. Test Procedure	21
6.5. Test Results	21
7. VOLTAGE FLUCTUATIONS & FLICKER TEST	23
7.1. Block Diagram of Test Setup	23
7.2. Test Standard	23
7.3. Operating Condition of EUT	23
7.4. Test Procedure	23
7.5. Test Results	23
8. ELECTROSTATIC DISCHARGE IMMUNITY TEST	25
8.1. Block Diagram of Test Setup	25
8.2. Test Standard	25
8.3. Severity Levels and Performance Criterion	25
8.4. EUT Configuration	26
8.5. Operating Condition of EUT	27

8.6.	Test Procedure	27
8.7.	Test Results.....	27
9.	RF FIELD STRENGTH SUSCEPTIBILITY TEST	29
9.1.	Block Diagram of Test Setup	29
9.2.	Test Standard.....	29
9.3.	Severity Levels and Performance Criterion.....	29
9.4.	EUT Configuration on Test.....	30
9.5.	Operating Condition of EUT	30
9.6.	Test Procedure	31
9.7.	Test Results.....	31
10.	ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST	32
10.1.	Block Diagram of EUT Test Setup	32
10.2.	Test Standard.....	32
10.3.	Severity Levels and Performance Criterion.....	32
10.4.	EUT Configuration on Test.....	33
10.5.	Operating Condition of EUT	33
10.6.	Test Procedure	33
10.7.	Test Results.....	34
11.	SURGE TEST	35
11.1.	Block Diagram of EUT Test Setup	35
11.2.	Test Standard.....	35
11.3.	Severity Levels and Performance Criterion.....	35
11.4.	EUT Configuration on Test.....	36
11.5.	Operating Condition of EUT	36
11.6.	Test Procedure	36
11.7.	Test Result.....	37
12.	INJECTED CURRENTS SUSCEPTIBILITY TEST	38
12.1.	Block Diagram of EUT Test Setup	38
12.2.	Test Standard.....	38
12.3.	Severity Levels and Performance Criterion.....	38
12.4.	EUT Configuration on Test.....	39
12.5.	Operating Condition of EUT	39
12.6.	Test Procedure	39
12.7.	Test Result.....	40
13.	MAGNETIC FIELD IMMUNITY TEST	41
13.1.	Block Diagram of Test Setup	41
13.2.	Test Standard.....	41
13.3.	Severity Levels and Performance Criterion.....	41
13.4.	EUT Configuration on Test.....	42
13.5.	Operating Condition of EUT	42
13.6.	Test Procedure	42
13.7.	Test Results.....	42
14.	VOLTAGE DIPS AND INTERRUPTIONS TEST	43
14.1.	Block Diagram of EUT Test Setup	43
14.2.	Test Standard.....	43
14.3.	Severity Levels and Performance Criterion.....	43
14.4.	EUT Configuration on Test.....	44
14.5.	Operating Condition of EUT	44
14.6.	Test Procedure	44
14.7.	Test Result.....	44
15.	EUT PHOTOGRAPHS	45

Shenzhen LST Testing Co., Ltd.

Applicant : Shenzhenshi yisibei guangdian co.,Ltd
Address : BaoanDistrict,Shenzhen,Guangdong,CN
Shenzhenshi yisibei guangdian co.,Ltd
Manufacturer : A602 FumanLou,FuyongRoad,FuyongStreet,
Address : BaoanDistrict,Shenzhen,Guangdong,CN
EUT : LED plant light
Model Number : WS0426
Trademark: : N/A
Test Date : Mar. 25, 2019 - Apr. 01, 2019
Date of Report : Apr. 01, 2019
Test Result: : The equipment under test was found to be compliance with the requirements of the standards applied.

Test Procedure Used:

EMI : EN 55015:2013+A1:2015
EN 61000-3-2:2014, EN 61000-3-3:2013

EMS : EN 61547:2009
EN 61000-4-2:2009, EN 61000-4-3:2006+A1:2008+A2:2010,
EN 61000-4-4:2012, EN 61000-4-5:2014,
EN 61000-4-6:2014, EN 61000-4-8:2010, EN 61000-4-11:2004

Prepared by(Engineer):



Reviewer(Supervisor):



Approved(Manager):



This test report is based on a single evaluation of one sample of above mentioned products. The test results in the report only apply to the tested sample. It is not permitted to be duplicated in extracts without written approval of Shenzhen LST Technology Co., Ltd.

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT : LED plant light
Trademark : N/A
Model Number WS0426
Power Supply : AC 230V,50/60Hz

1.2. Tested System Details

None.

1.3. Test Uncertainty

Conducted Emission : $\pm 2.66\text{dB}$
Uncertainty

Radiated Emission Uncertainty : $\pm 4.26\text{dB}$

1.4. Test Facility

Site Description :

Name of Firm : Shenzhen LST Technology Co., Ltd.

Address : Huichao Building, Yintian Industry zone, Baoan
District, Shenzhen, Guangdong P.R. China

2. TEST INSTRUMENT USED

For Conducted Emission at the mains terminals Test

Conducted Emission Test (A --- site)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
843 Shielded Room	ChengYu	843 Room	843	Aug. 25, 2018	Aug. 24, 2019
EMI Receiver	R&S	ESCI	101421	Aug. 27, 2018	Aug. 26, 2019
LISN	Schwarzbeck	NSLK8127	8127739	Sep. 07, 2018	Sep. 06, 2019
Attenuator	R&S	ESH3-Z2	LST021E	Aug. 25, 2018	Aug. 24, 2019
843 Cable 1#	FUJIKURA	843C1#	001	Aug. 25, 2018	Aug. 24, 2019

For Magnetic Emission Test

Conducted Emission Test (A --- site)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
843 Shielded Room	ChengYu	843 Room	843	Aug. 25, 2018	Aug. 24, 2019
EMI Receiver	R&S	ESCI	101421	Aug. 27, 2018	Aug. 26, 2019
Three-loop antenna	DAZE	ZN30401	13017	Aug. 25, 2018	Aug. 24, 2019
Attenuator	R&S	ESH3-Z2	LST021E	Aug. 25, 2018	Aug. 24, 2019
843 Cable 2#	FUJIKURA	843C1#	002	Aug. 25, 2018	Aug. 24, 2019

For Radiated Emission Test


Radiation Emission Test (966 chamber)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
966 chamber	ChengYu	966 Room	966	Aug. 25, 2018	Aug. 24, 2019
Spectrum Analyzer	Agilent	E4407B	MY45109572	Aug. 27, 2018	Aug. 26, 2019
Amplifier	Schwarzbeck	BBV9743	9743-119	Aug. 25, 2018	Aug. 24, 2019
Amplifier	Schwarzbeck	BBV9718	9718-270	Aug. 25, 2018	Aug. 24, 2019
Log-periodic Antenna	Schwarzbeck	VULB9160	VULB9160-3369	Sep. 07, 2018	Sep. 06, 2019
EMI Receiver	R&S	ESCI	101421	Aug. 27, 2018	Aug. 26, 2019
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1275	Aug. 25, 2018	Aug. 24, 2019
966 Cable 1#	CHENGYU	966	004	Aug. 25, 2018	Aug. 24, 2019
966 Cable 2#	CHENGYU	966	003	Aug. 25, 2018	Aug. 24, 2019

For Electrostatic Discharge Immunity Test

For Electrostatic Discharge Immunity Test (A --- site)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
ESD Tester	KIKISUI	KES4201A	UH002321	Aug. 28, 2018	Aug. 27, 2019

3. CONDUCTED EMISSION AT THE MAINS TERMINALS TEST

3.1. Block Diagram Of Test Setup

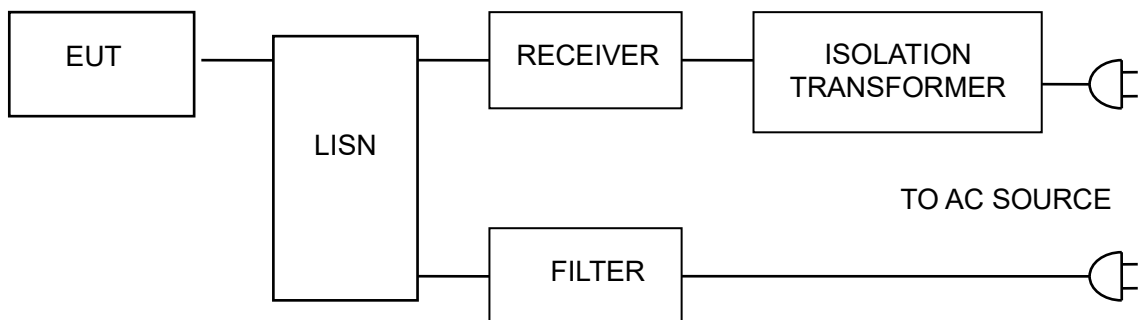

3.2. Test Standard

EN 55015:2013+A1:2015

3.3. Power Line Conducted Emission Limit

Frequency MHz	Limits dB(μV)	
	Quasi-peak Level	Average Level
0.009 ~ 0.05	110	N/A
0.05 ~ 0.15	90 ~ 80*	N/A
0.15 ~ 0.50	66 ~ 56*	56 ~ 46*
0.50 ~ 5.00	56	46
5.00 ~ 30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

3.4. EUT Configuration on Test

The following equipments are installed on conducted emission test to meet EN55015 requirement and operating in a manner which tends to maximize its emission characteristics in a normal application.

3.5. Operating Condition of EUT

3.5.1 Setup the EUT and simulators as shown in Section 3.1.

3.5.2 Turn on the power of all equipments.

3.5.3 Let the EUT work in test modes and test it.

3.6. Test Procedure

The EUT is put on the ground and connected to the AC mains through a Artificial Mains Network (AMN). This provided a 50ohm coupling impedance for the tested equipments. Both sides of AC line are checked to find out the maximum conducted emission levels according to the **EN55015** regulations during conducted emission test.

The bandwidth of the test receiver (R&S Test Receiver ESCI) is set at 10KHz.

The frequency range from 150 KHz to 30 MHz is investigated.

3.7. Test Result

PASS

Please refer to the following page.

Conducted Emission Test Data


Temperature:	24.5 °C	Relative Humidity:	54%
Pressure:	1009hPa	Phase :	L
Test Voltage :	AC 230V	Test Mode:	Lighting

Conducted Emission Measurement

File :5

Data :#1

120.0 dBuV/m

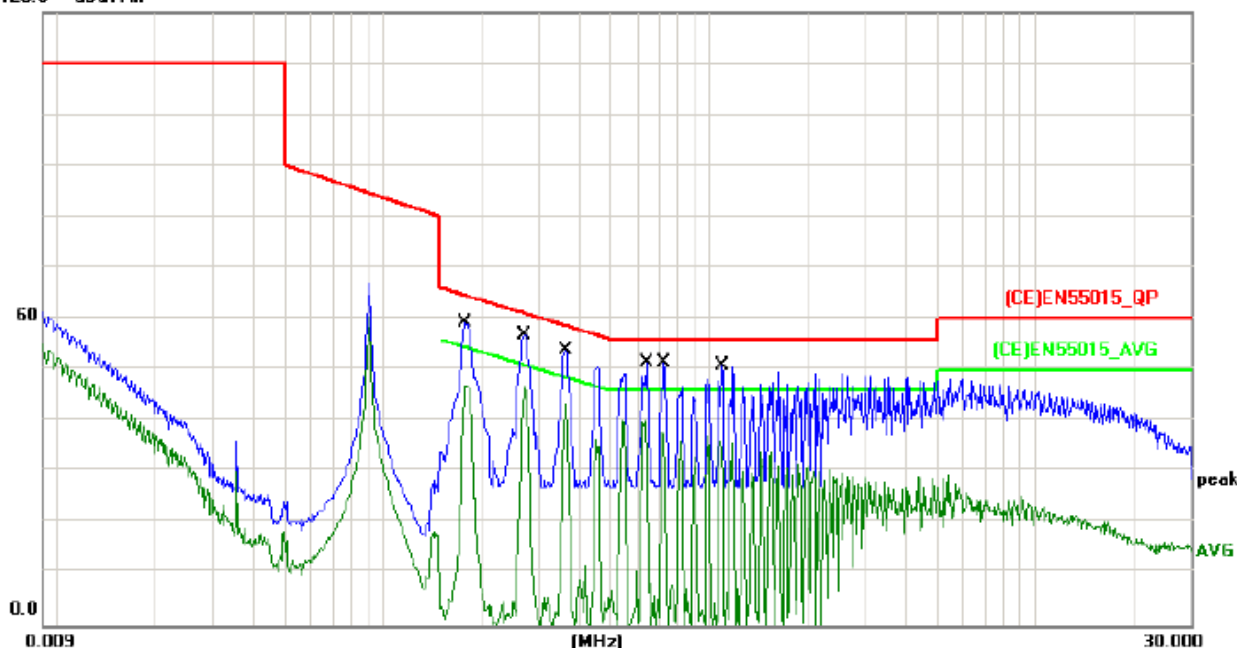


No.	Mk.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dB	Over dB	Detector	Comment
1		0.1780	49.61	9.58	59.19	64.57	-5.38	QP	
2		0.1780	5.32	9.58	14.90	54.57	-39.67	AVG	
3	*	0.2700	47.26	9.59	56.85	61.12	-4.27	QP	
4		0.2700	-5.70	9.59	3.89	51.12	-47.23	AVG	
5		0.3620	44.24	9.60	53.84	58.68	-4.84	QP	
6		0.3620	-11.17	9.60	-1.57	48.68	-50.25	AVG	
7		0.6419	41.84	9.61	51.45	56.00	-4.55	QP	
8		0.6419	-9.94	9.61	-0.33	46.00	-46.33	AVG	
9		0.7300	41.94	9.61	51.55	56.00	-4.45	QP	
10		0.7300	-1.75	9.61	7.86	46.00	-38.14	AVG	
11		1.0900	41.17	9.60	50.77	56.00	-5.23	QP	
12		1.0900	11.99	9.60	21.59	46.00	-24.41	AVG	

*:Maximum data x:Over limit !:over margin

Conducted Emission Test Data

Temperature:	24.5 °C	Relative Humidity:	54%
Pressure:	1009hPa	Phase :	N
Test Voltage :	AC 230V	Test Mode:	Lighting

Conducted Emission Measurement

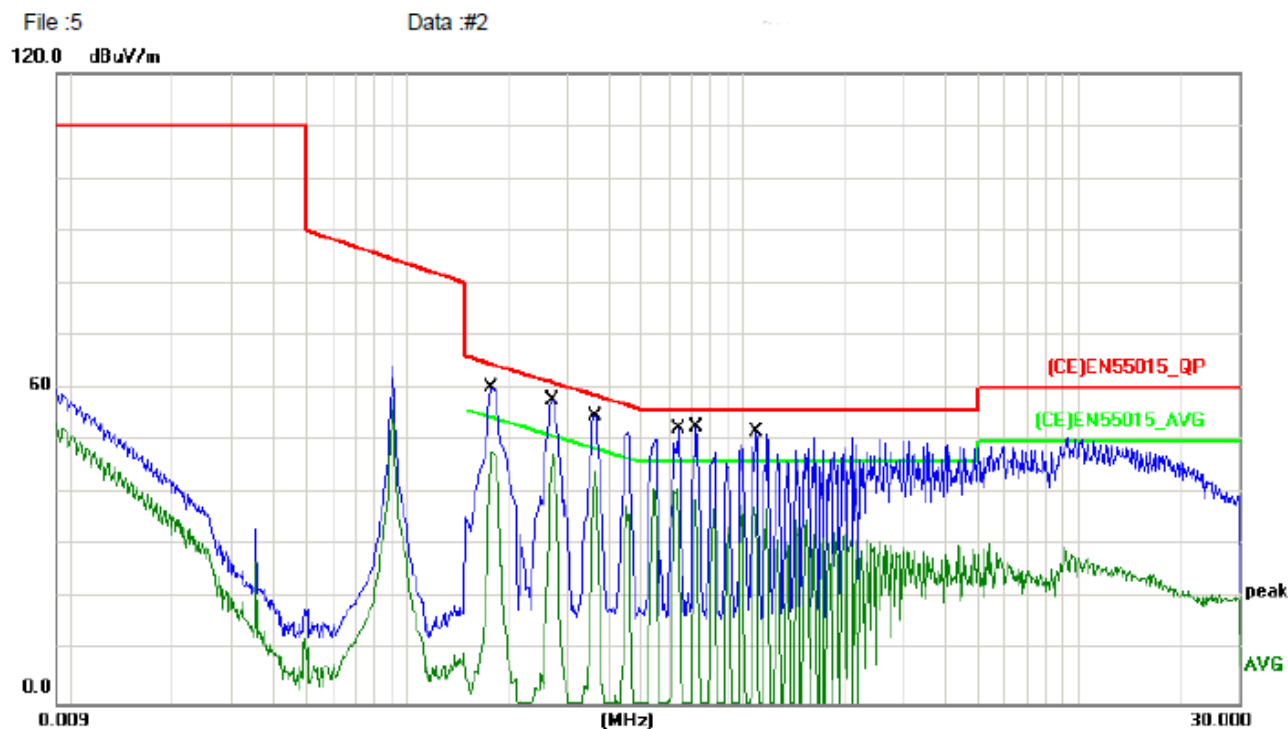


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV/m	dB	dBuV/m	dB	dB	Detector	Comment
1		0.1780	50.61	9.58	60.19	64.57	-4.38	QP	
2		0.1780	-3.06	9.58	6.52	54.57	-48.05	AVG	
3	*	0.2700	48.26	9.59	57.85	61.12	-3.27	QP	
4		0.2700	-15.19	9.59	-5.60	51.12	-56.72	AVG	
5		0.3620	45.24	9.60	54.84	58.68	-3.84	QP	
6		0.3620	7.25	9.60	16.85	48.68	-31.83	AVG	
7		0.6419	42.84	9.61	52.45	56.00	-3.55	QP	
8		0.6419	29.19	9.61	38.80	46.00	-7.20	AVG	
9		0.7300	42.94	9.61	52.55	56.00	-3.45	QP	
10		0.7300	20.67	9.61	30.28	46.00	-15.72	AVG	
11		1.0900	42.17	9.60	51.77	56.00	-4.23	QP	
12		1.0900	24.10	9.60	33.70	46.00	-12.30	AVG	

*:Maximum data x:Over limit !:over margin

4. MAGNETIC EMISSION TEST

4.1. Block Diagram Of Test Setup

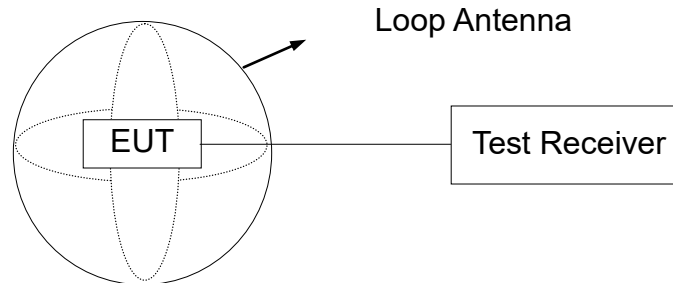

4.2. Test Standard

EN 55015:2013+A1:2015

4.3. Power Line Conducted Emission Limit

Frequency MHz	Limits dB(μ A)
	Quasi-peak Level
0.009 ~ 0.07	88
0.07 ~ 0.15	88 ~ 58*
0.15 ~ 0.50	58 ~ 22*
0.50 ~ 5.00	22

Notes: 1. *Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

4.4. EUT Configuration on Test

The following equipments are installed on conducted emission test to meet EN55015 requirement and operating in a manner which tends to maximize its emission characteristics in a normal application.

4.5. Operating Condition of EUT

4.5.1 Setup the EUT and simulators as shown in Section 3.1.

4.5.2 Turn on the power of all equipments.

4.5.3 Let the EUT work in test modes and test it.

4.6. Test Procedure

The EUT is placed on a wood table in the center of a loop antenna. The induced current in the loop antenna is measured by means of a current probe and the test receiver. Three field components is checked by means of a coax switch.

The frequency range from 9KHz to 30MHz is investigated. The receiver is measured with the quasi-peak detector. For frequency band 9KHz to 150KHz, the bandwidth of the field strength meter (R&S Test Receiver ESCI) is set at 200Hz. For frequency band 150KHz to 30MHz , the bandwidth is set at 10KHz.

4.7. Test Result


PASS

Please refer to the following page.

Magnetic Emission Test Data

Temperature:	24.5 °C	Relative Humidity:	54%
Pressure:	1009hPa	ANT. POLARITY	X
Test Voltage :	AC 230V	Test Mode:	ON Mode

Radiated Emission Measurement

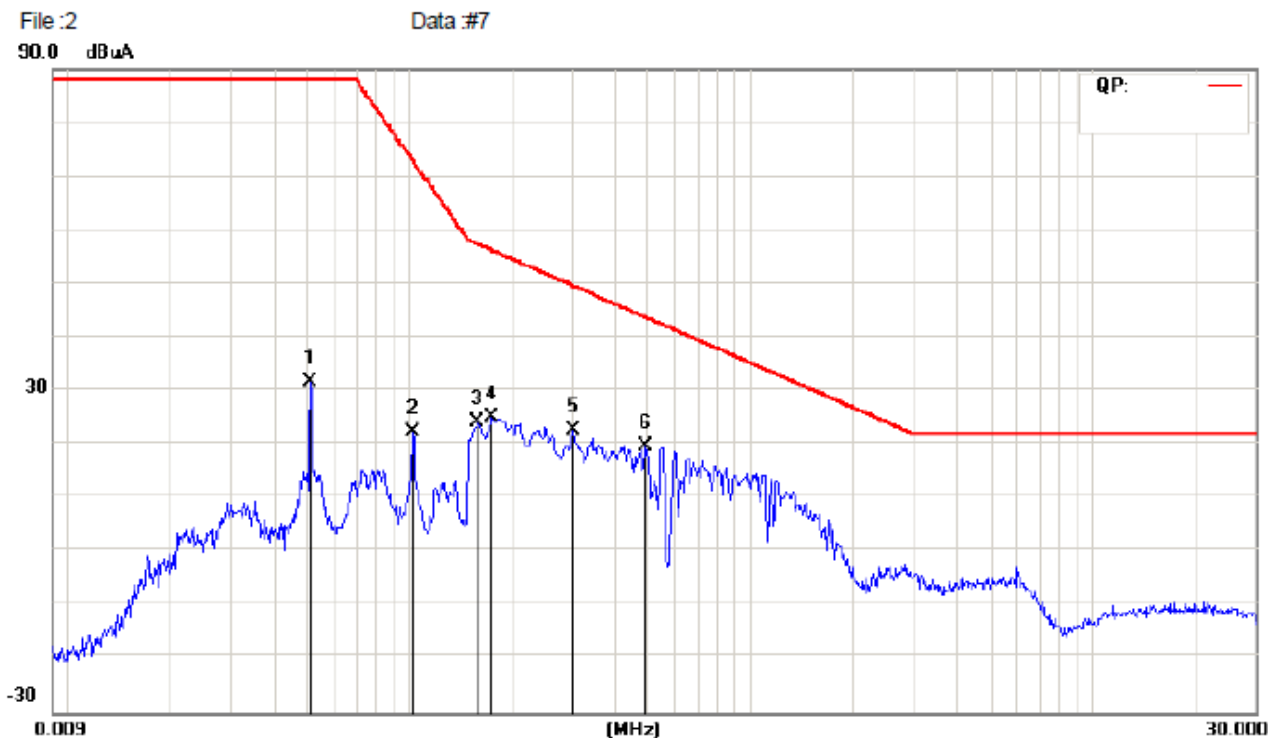

No.	Mk.	Freq. MHz	Reading Level dBuA	Correct Factor dB	Measure- ment dBuA	Limit dBuA	Over dB	Detector	Comment
1		0.0513	10.80	20.75	31.55	88.00	-56.45	peak	
2		0.1023	2.88	19.42	22.30	73.05	-50.75	peak	
3		0.1580	4.31	19.86	24.17	57.37	-33.20	peak	
4		0.1740	5.10	19.99	25.09	56.21	-31.12	peak	
5		0.3020	2.34	20.40	22.74	49.58	-26.84	peak	
6	*	0.4900	-0.98	20.69	19.71	43.77	-24.06	peak	

*:Maximum data x:Over limit !:over margin

Magnetic Emission Test Data


Temperature:	24.5 °C	Relative Humidity:	54%
Pressure:	1009hPa	ANT. POLARITY	Y
Test Voltage :	AC 230V	Test Mode:	ON Mode

Radiated Emission Measurement

File :2

Data :#8

90.0 dBuA

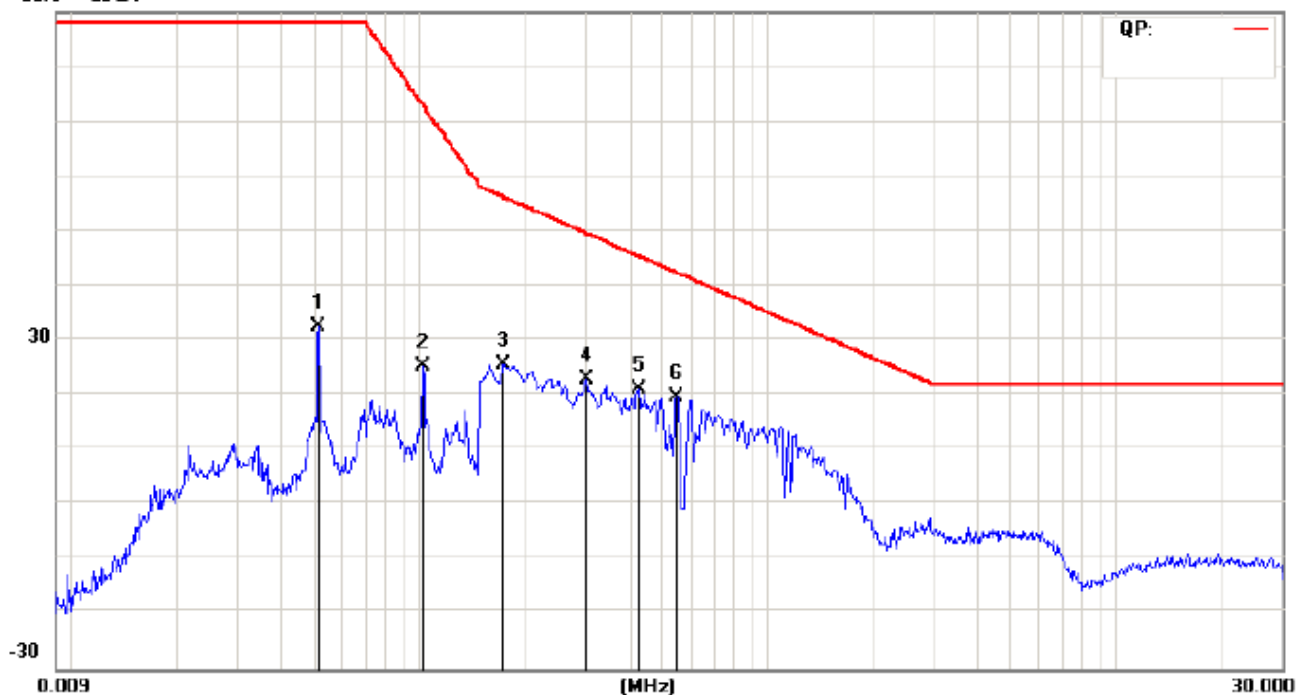

No. Mk.	Freq. MHz	Reading Level dBuA	Correct Factor dB	Measure- ment dBuA	Limit dBuA	Over dB	Detector	Comment
1	0.0511	11.88	20.76	32.64	88.00	-55.36	peak	
2	0.1021	5.83	19.42	25.25	73.13	-47.88	peak	
3	0.1740	5.80	19.99	25.79	56.21	-30.42	peak	
4	0.3020	2.54	20.40	22.94	49.58	-26.64	peak	
5	0.4260	0.59	20.63	21.22	45.45	-24.23	peak	
6 *	0.5460	-1.05	20.75	19.70	42.47	-22.77	peak	

*:Maximum data x:Over limit !:over margin

Magnetic Emission Test Data

Temperature:	24.5 °C	Relative Humidity:	54%
Pressure:	1009hPa	ANT. POLARITY	Z
Test Voltage :	AC 230V	Test Mode:	ON Mode

Radiated Emission Measurement

File :2

Data :#9

90.0 dBuA




No.	Mk.	Freq. MHz	Reading Level dBuA	Correct Factor dB	Measure- ment dBuA	Limit dBuA	Over dB	Detector	Comment
1		0.0512	7.47	18.77	26.24	88.00	-61.76	peak	
2		0.1739	-0.65	19.89	19.24	56.22	-36.98	peak	
3		0.2500	-3.80	20.20	16.40	51.85	-35.45	peak	
4		0.2979	-3.93	20.30	16.37	49.75	-33.38	peak	
5		0.4259	-6.10	20.53	14.43	45.45	-31.02	peak	
6	*	0.5460	-7.41	20.65	13.24	42.47	-29.23	peak	

*:Maximum data x:Over limit l:over margin

5. RADIATION EMISSION TEST

5.1. Block Diagram of Test Setup

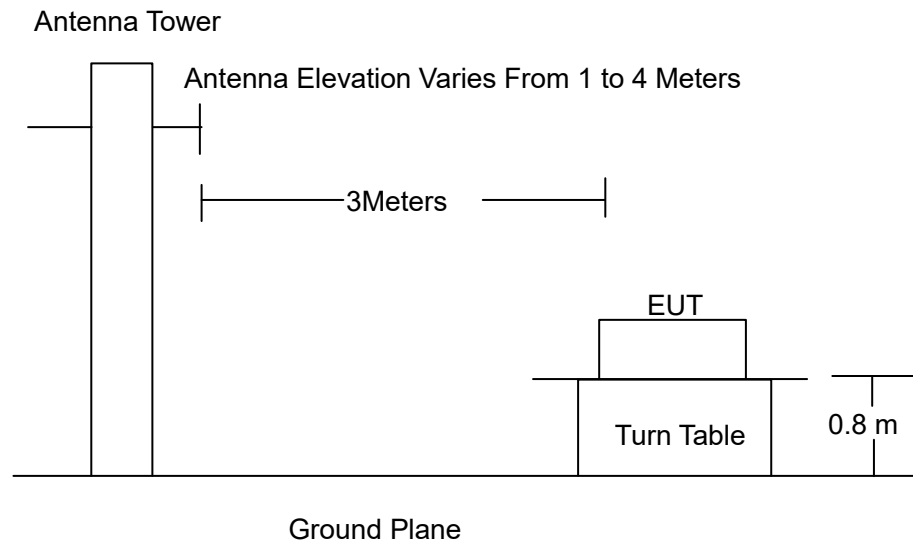

5.2. Test Standard

EN 55015:2013+A1:2015

5.3. Radiation Limit

Frequency MHz	Distance (Meters)	Field Strengths Limits dB(μ V)/m
30 ~ 230	3	40.0
230 ~ 1000	3	47.0

Remark:

- (1) Emission level (dB(μ V)/m) = 20 log Emission level (μ V/m)
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance refers to the distance in meters between the measuring instrument, antenna and the closed point of any part of the device or system.

5.4. EUT Configuration on Test

The EN55015 regulations test method must be used to find the maximum emission during radiated emission test.
The configuration of EUT is the same as used in conducted emission test.
Please refer to Section 2.2.

5.5. Operating Condition of EUT

Same as conducted emission test, which is listed in Section 2.2 except the test set up replaced as Section 4.1.

5.6. Test Procedure

The EUT and its simulators are placed on a turned table that is 0.8 meter above the ground. The turned table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna that is mounted on the antenna tower. The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated biconical and log periodical antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna is set on test. In order to find the maximum emission levels, the interface cable must be manipulated according to EN55015 on radiated emission test.

The bandwidth setting on the field strength meter (R&S Test Receiver ESCI) is set at 120KHz.

The frequency range from 30MHz to 1000MHz is checked.

5.7. Test Result

PASS

Please refer to the following page.

Radiation Emission Test Data


Temperature:	24.5 °C	Relative Humidity:	54%
Pressure:	1009hPa	Phase :	Horizontal
Test Voltage :	AC 230V	Test Mode:	ON Mode

Radiated Emission Measurement

File :7

Data :#46

60.0 dBuV/m

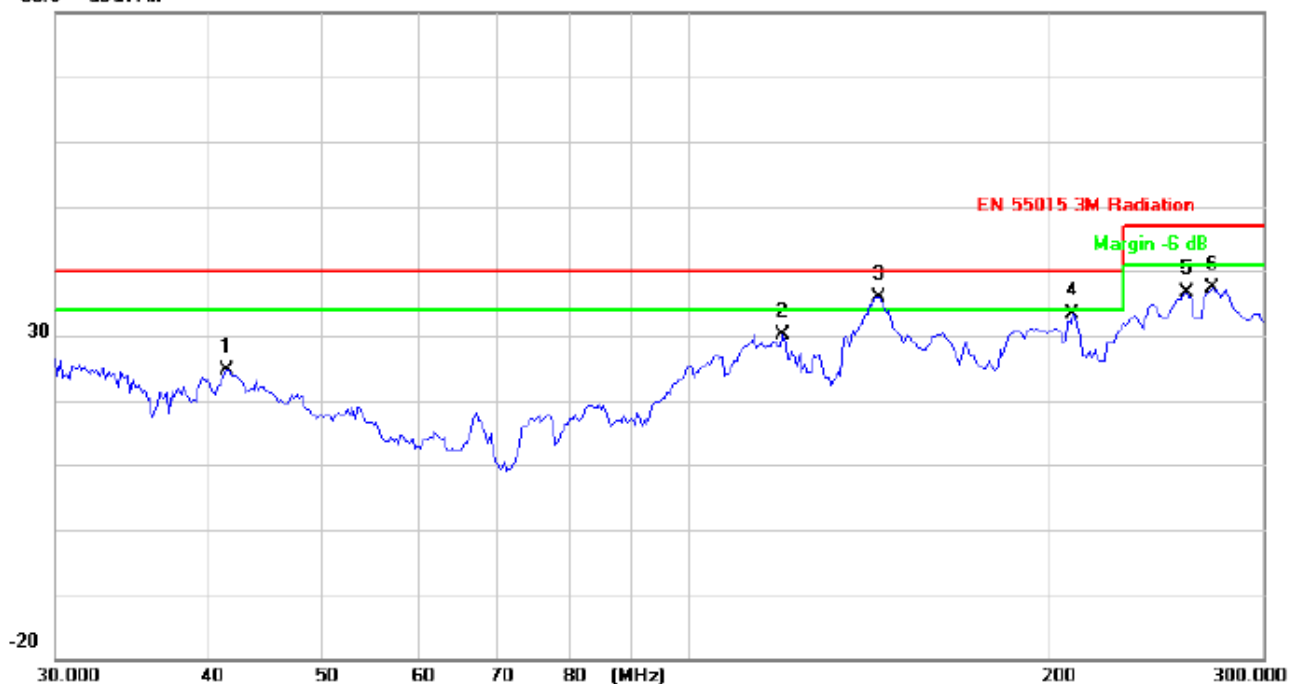

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		41.6026	44.52	-19.97	24.55	40.00	-15.45	peak		
2		119.9834	52.48	-22.31	30.17	40.00	-9.83	peak		
3	*	144.2518	57.98	-22.02	35.96	40.00	-4.04	peak		
4		208.5072	52.70	-19.42	33.28	40.00	-6.72	peak		
5		258.8935	53.51	-16.86	36.65	47.00	-10.35	peak		
6		272.3462	53.90	-16.57	37.33	47.00	-9.67	peak		

*:Maximum data x:Over limit !:over margin

Radiation Emission Test Data


Temperature:	24.5 °C	Relative Humidity:	54%
Pressure:	1009hPa	Phase :	Vertical
Test Voltage :	AC 230V	Test Mode:	ON Mode

Radiated Emission Measurement

File :7

Data :#45

60.0 dBuV/m

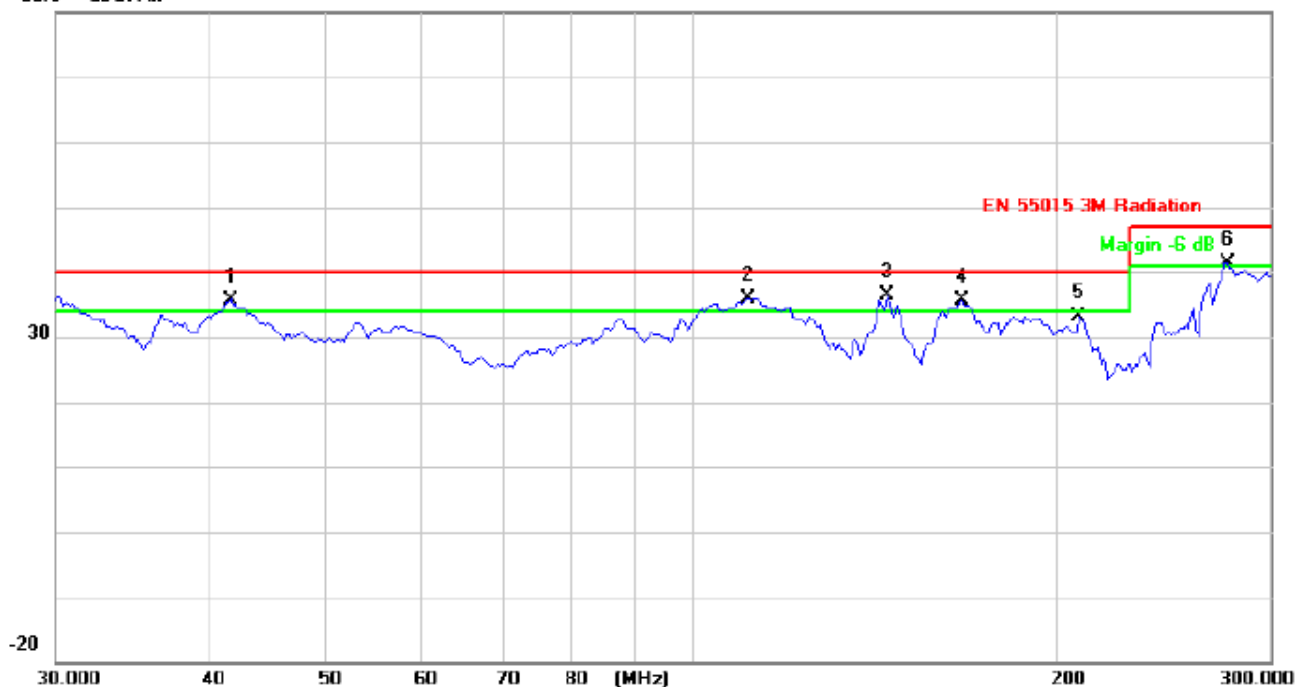


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	!	41.7946	55.82	-20.07	35.75	40.00	-4.25	peak		
2	!	111.4605	58.29	-22.45	35.84	40.00	-4.16	peak		
3	*	144.9175	58.30	-21.96	36.34	40.00	-3.66	peak		
4	!	167.1556	56.25	-20.60	35.65	40.00	-4.35	peak		
5		208.5072	52.50	-19.42	33.08	40.00	-6.92	peak		
6	!	276.1349	57.87	-16.50	41.37	47.00	-5.63	peak		

*:Maximum data x:Over limit !:over margin

6. HARMONIC CURRENT EMISSION TEST

6.1. Block Diagram of Test Setup

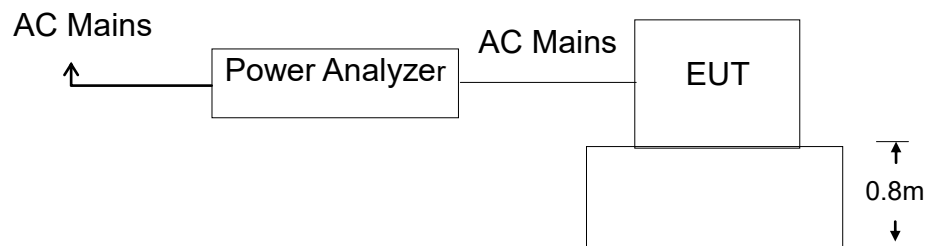

6.2. Test Standard

EN 61000-3-2:2014

6.3. Operating Condition of EUT

- 6.3.1 Setup the EUT as shown in Section 6.1.
- 6.3.2 Turn on the power of all equipments.
- 6.3.3 Let the EUT work in test mode and test it.

6.4. Test Procedure

The power cord of the EUT is connected to the output of the test system. Turn on the power of the EUT and use the test system to test the harmonic current level.

6.5. Test Results

PASS

Please refer to the following page.

Current Test Result Summary (Run time)

Test category: Class-C per Ed. 4.0 (2014) (European limits) Test Margin: 100
 Test date: 2019-03-28 Start time: 11:05:13 End time: 11:10:01
 Test duration (min): 2.5 Data file name: H-000160.cts_data
 Comment: Lighting Temp.:25.5°C Humi.:55%
 Test Result: Pass Source qualification: Normal
 THC(A): 0.09 I-THD(%): 25.84 POHC(A): 0.000 POHC Limit(A): 0.034
 Highest parameter values during test:
 V_RMS (Volts): 229.81 Frequency(Hz): 50.00
 I_Peak (Amps): 0.664 I_RMS (Amps): 0.868
 I_Fund (Amps): 0.355 Crest Factor: 1.824

Harm#	Harms(avg)	100%Limit	%of Limit	Harms(max)	150%Limit	%of Limit	Status
2	0.001	0.007	0.0	0.001	0.011	0.00	Pass
3	0.084	0.097	86.7	0.084	0.145	58.43	Pass
4	0.001						
5	0.032	0.035	90.8	0.032	0.053	61.35	Pass
6	0.000						
7	0.009	0.025	35.3	0.009	0.037	24.00	Pass
8	0.000						
9	0.007	0.018	38.8	0.007	0.027	26.86	Pass
10	0.000						
11	0.008	0.011	71.7	0.008	0.016	48.54	Pass
12	0.000						
13	0.006	0.011	56.0	0.006	0.016	38.62	Pass
14	0.000						
15	0.006	0.011	52.4	0.006	0.016	35.23	Pass
16	0.000						
17	0.003	0.011	0.0	0.003	0.000	0.00	Pass
18	0.000						
19	0.005	0.011	46.8	0.005	0.016	31.69	Pass
20	0.000						
21	0.004	0.011	0.0	0.004	0.016	0.00	Pass
22	0.000						
23	0.003	0.011	0.0	0.003	0.016	0.00	Pass
24	0.000						
25	0.003	0.011	0.0	0.003	0.016	0.00	Pass
26	0.000						
27	0.003	0.011	0.0	0.003	0.016	0.00	Pass
28	0.000						
29	0.003	0.011	0.0	0.003	0.016	0.00	Pass
30	0.000						
31	0.002	0.011	0.0	0.002	0.016	0.00	Pass
32	0.000						
33	0.003	0.011	0.0	0.003	0.016	0.00	Pass
34	0.000						
35	0.002	0.011	0.0	0.002	0.016	0.00	Pass
36	0.000						
37	0.002	0.011	0.0	0.002	0.016	0.00	Pass
38	0.000						
39	0.002	0.011	0.0	0.002	0.016	0.00	Pass
40	0.000						

Note: Dynamic limits were applied for this test. The highest harmonics values in the above table may not occur at the same window as the maximum harmonics/limit ratio.

7. VOLTAGE FLUCTUATIONS & FLICKER TEST

7.1. Block Diagram of Test Setup

Same as Section 6.1..

7.2. Test Standard

EN 61000-3-3:2013

7.3. Operating Condition of EUT

Same as Section 5.3.. The power cord of the EUT is connected to the output of the test system. Turn on the power of the EUT and use the test system to test the harmonic current level.

Flicker Test Limit

Test items	Limits
Pst	1.0
dc	3.3%
dmax	4.0%
dt	Not exceed 3.3% for 500ms

7.4. Test Procedure

The power cord of the EUT is connected to the output of the test system. Turn on the power of the EUT and use the test system to test the harmonic current level.

7.5. Test Results

PASS

Please refer to the following page.

Flicker Test Summary

Test category: All parameters (European limits)

Test date: 2019-03-28

Start time: 15:12:02

Test Margin: 100

Test duration (min): 10

Data file name: F-000125.cts_data

End time: 15:24:08

Comment: Lighting

Test Result: Pass

Status: Test Completed

Pst_i and limit line

European Limits



Plt and limit line



Parameter values recorded during the test:

Vrms at the end of test (Volt): 230.06

Highest dt (%): 0.13

Time(mS) > dt: 0.0

Highest dc (%): 0.00

Highest dmax (%): 0.11

Highest Pst (10 min. period): 0.160

Highest Plt (2 hr. period): 0.070

Test limit (%): 3.30 Pass

Test limit (mS): 500.0 Pass

Test limit (%): 3.30 Pass


Test limit (%): 4.00 Pass

Test limit: 1.000 Pass

Test limit: 0.650 Pass

8. ELECTROSTATIC DISCHARGE IMMUNITY TEST

8.1. Block Diagram of Test Setup

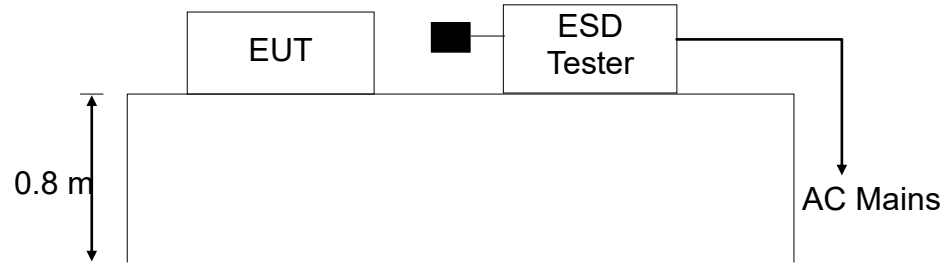

8.2. Test Standard

EN 61547:2009, EN 61000-4-2:2009

Severity Level: 3 / Air Discharge: $\pm 8\text{KV}$

Level: 2 / Contact Discharge: $\pm 4\text{KV}$

8.3. Severity Levels and Performance Criterion

8.3.1 Severity level

Level	Test Voltage Contact Discharge (KV)	Test Voltage Air Discharge (KV)
1.	± 2	± 2
2.	± 4	± 4
3.	± 6	± 8
4.	± 8	± 15
X	Special	Special

8.3.2 Performance criterion : B

A. The equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

B. After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance.

During the test, degradation of performance is allowed. However, no change of operating state or stored data is allowed to persist after the test.

If the minimum performance level (or the permissible performance loss) is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

C. Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions. Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

8.4.EUT Configuration

The following equipments are installed on Electrostatic Discharge Immunity test to meet EN 61547:2009, EN 61000-4-2:2009, requirement and operating in a manner which tends to maximize its emission characteristics in a normal application. The configuration of EUT is the same as used in conducted emission test.

Please refer to Section 2.4.

8.5. Operating Condition of EUT

Same as conducted emission measurement, which is listed in Section 3.5 except the test setup replaced by Section 7.1.2.

8.6. Test Procedure

8.6.1 Air Discharge:

This test is done on a non-conductive surface. The round discharge tip of the discharge electrode shall be approached as fast as possible to touch the EUT. After each discharge, the discharge electrode shall be removed from the EUT. The generator is then re-triggered for a new single discharge and repeated 10 times for each pre-selected test point. This procedure shall be repeated until all the air discharge completed.

8.6.2 Contact Discharge:

All the procedure shall be same as Section 7.6.1. Except that the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.

8.6.3 Indirect discharge for horizontal coupling plane

At least 10 single discharges (in the most sensitive polarity) shall be applied at the front edge of each HCP opposite the center point of each unit (if applicable) of the EUT and 0.1m from the front of the EUT. The long axis of the discharge electrode shall be in the plane of the HCP and perpendicular to its front edge during the discharge.

8.6.4 Indirect discharge for vertical coupling plane

At least 10 single discharges (in the most sensitive polarity) shall be applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m X 0.5m, is placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges shall be applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are complete illuminated.

8.7. Test Results


PASS

Please refer to the following page.

ESD Test Data				
Temperature:	24.5℃	Humidity:	53%	
Power Supply :	AC 230V	Test Mode:	On	
Air Discharge: ± 8KV				
Contact Discharge: ± 4KV				
Test Points	Air Discharge	Contact Discharge	Performance Criterion	Result
Slit	±2,4,8KV	N/A	B	PASS
Metal Part	N/A	±2,4 KV	B	PASS
VCP	N/A	±2,4 KV	B	PASS
HCP	N/A	±2,4 KV	B	PASS
Note: N/A				

9. RF FIELD STRENGTH SUSCEPTIBILITY TEST

9.1. Block Diagram of Test Setup

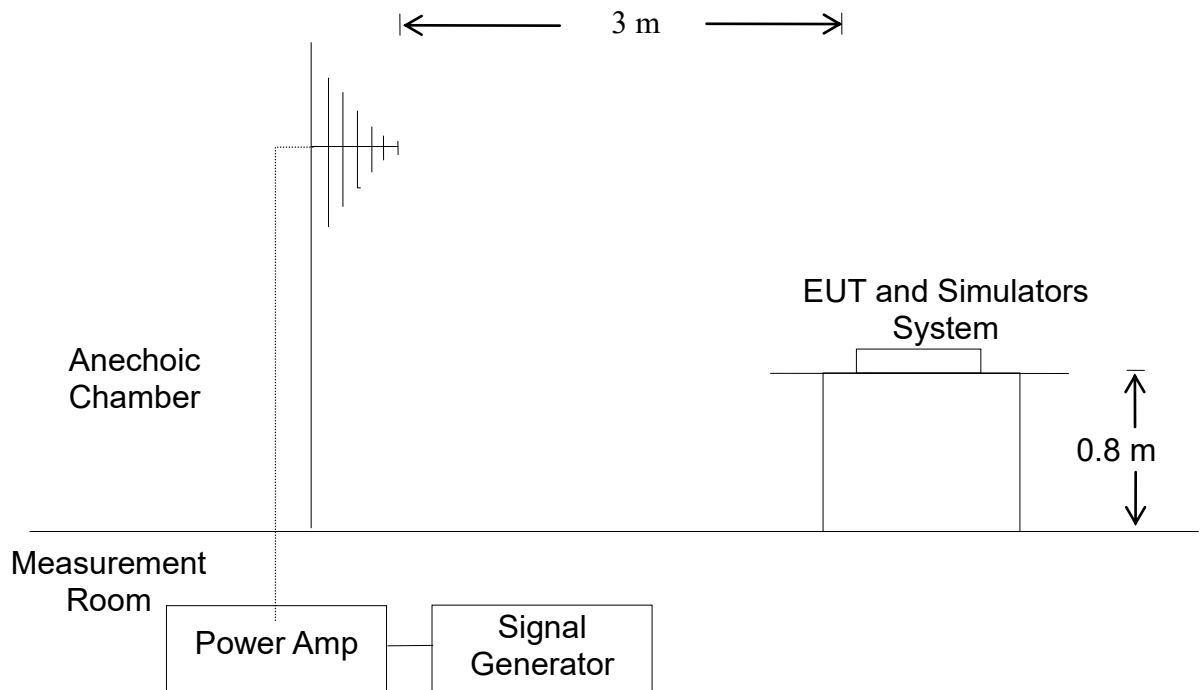

9.2. Test Standard

EN 61547:2009, EN 61000-4-3: 2006+A1:2008+A2:2010
Severity Level 2, 3V / m

9.3. Severity Levels and Performance Criterion

9.3.1. Severity level

Level	Field Strength V/m
1.	1
2.	3
3.	10
X.	Special

9.3.2. Performance criterion: A

- A、 The equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.
- B、 After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance.

During the test, degradation of performance is allowed. However, no change of operating state or stored data is allowed to persist after the test.

If the minimum performance level (or the permissible performance loss) is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

- C、 Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions. Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

9.4.EUT Configuration on Test

The following equipments are installed on Electrical Fast Transient/Burst Immunity test to meet EN 61547:2009, EN 61000-4-4:2012, requirement and operating in a manner which tends to maximize its emission characteristics in a normal application. The configuration of EUT is the same as used in conducted emission test.

Please refer to Section 3.4.

9.5.Operating Condition of EUT

Same as conducted emission measurement, which is listed in Section 2.5 except the test setup replaced by Section 8.1.

9.6. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. EUT is set 3 meter away from the transmitting antenna which is mounted on an antenna tower. Both horizontal and vertical polarization of the antenna are set on test. Each of the four sides of EUT must be faced this transmitting antenna and measured individually.

All the scanning conditions are as follows :

Condition of Test	Remarks
1. Fielded Strength	3 V/m (Severity Level 2)
2. Radiated Signal	Modulated
3. Scanning Frequency	80 – 1000 MHz
4. Dwell time of radiated	0.0015 decade/s
5. Waiting Time	1 Sec.

9.7. Test Results


PASS

Please refer to the following page.

R/S Test Data			
Temperature : 25℃		Humidity : 53%	
Field Strength: 3 V/m		Criterion: A	
Power Supply: AC 230V		Frequency Range: 80 MHz to 1000 MHz	
Modulation: <input checked="" type="checkbox"/> AM <input type="checkbox"/> Pulse <input type="checkbox"/> none 1 KHz 80%			
Test Mode : On			
	Frequency Range : 80-1000MHz		
Steps	1 %		
	Horizontal	Vertical	Result
Front	A	A	Pass
Right	A	A	Pass
Rear	A	A	Pass
Left	A	A	Pass
Note: N/A			

10. ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST

10.1. Block Diagram of EUT Test Setup



10.2. Test Standard

EN 61547:2009, EN 61000-4-4:2012

10.3. Severity Levels and Performance Criterion

Severity Level 2 at 1KV, Pulse Rise time & Duration: 5 nS / 50 nS

Severity Level:

Open Circuit Output Test Voltage $\pm 10\%$		
Level	On power ports	On I/O(Input/Output) Signal data and control ports
1.	0.5KV	0.25KV
2.	1KV	0.5KV
3.	2KV	1KV
4.	4KV	2KV
X.	Special	Special

Performance criterion: B

- A. The equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.
- B. After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance.

During the test, degradation of performance is allowed. However, no change of operating state or stored data is allowed to persist after the test.

If the minimum performance level (or the permissible performance loss) is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

- C. Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions. Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

10.4. EUT Configuration on Test

The following equipments are installed on Electrical Fast Transient/Burst Immunity test to meet EN 61547:2009, EN 61000-4-4:2012, requirement and operating in a manner which tends to maximize its emission characteristics in a normal application. The configuration of EUT is the same as used in conducted emission test.

Please refer to Section 3.4.

10.5. Operating Condition of EUT

Same as conducted emission measurement, which is listed in Section 2.6 except the test setup replaced by Section 9.1.

10.6. Test Procedure

EUT shall be placed 0.8m high above the ground reference plane which is a min.1m*1m metallic sheet with 0.65mm minimum thickness. This reference ground plane shall project beyond the EUT by at least 0.1m on all sides and the minimum distance between EUT and all other conductive structure, except the ground plane beneath the EUT, shall be more than 0.5m

10.6.1. For input and output AC power ports:

The EUT is connected to the power mains by using a coupling device which couples the EFT interference signal to AC power lines. Both polarities of the test voltage should be applied during compliance test and the duration of the test is 2 minutes.

10.7. Test Results

Test Point	Polarity	Test Level (kV)	Performance Criterion	Observation	Result
L 1	+/-	1	B	Note <input type="checkbox"/> 1 <input checked="" type="checkbox"/> 2	PASS
L 2	+/-	1	B	Note <input type="checkbox"/> 1 <input checked="" type="checkbox"/> 2	PASS
L 1-L 2	+/-	1	B	Note <input type="checkbox"/> 1 <input checked="" type="checkbox"/> 2	PASS
PE	+/-	--	--	Note <input type="checkbox"/> 1 <input type="checkbox"/> 2	N/A
L – PE	+/-	--	--	Note <input type="checkbox"/> 1 <input type="checkbox"/> 2	N/A
N – PE	+/-	--	--	Note <input type="checkbox"/> 1 <input type="checkbox"/> 2	N/A
L – N – PE	+/-	--	--	Note <input type="checkbox"/> 1 <input type="checkbox"/> 2	N/A
RJ45 UTP cable	--	--	--	Note <input type="checkbox"/> 1 <input type="checkbox"/> 2	N/A

NOTE: 1. There was no change compared with initial operation during the test.

2. The loss of function of the EUT during the test and it was recovered by itself operation after the test.

11. SURGE TEST

11.1. Block Diagram of EUT Test Setup



11.2. Test Standard

EN 61547:2009, EN61000-4-5:2014

11.3. Severity Levels and Performance Criterion

Severity Level: Line to Line, Level 2 at 1KV;

Severity Level: Line to Earth, Level 3 at 2KV.

Severity Level	Open-Circuit Test Voltage (KV)
1.	0.5
2.	1.0
3.	2.0
4.	4.0
X.	Special

Performance criterion: B

- A. The equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.
- B. After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance.

During the test, degradation of performance is allowed. However, no change of operating state or stored data is allowed to persist after the test.

If the minimum performance level (or the permissible performance loss) is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

- C. Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions. Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

11.4. EUT Configuration on Test

The following equipments are installed on Electrical Fast Transient/Burst Immunity test to meet EN 61547:2009, EN61000-4-5:2014, requirement and operating in a manner which tends to maximize its emission characteristics in a normal application

The configuration of EUT is the same as used in conducted emission test. Please refer to Section 3.4.

11.5. Operating Condition of EUT

Same as conducted emission measurement, which is listed in Section 2.7 except the test setup replaced by Section 10.1.

11.6. Test Procedure

- 1) Set up the EUT and test generator as shown on section 10.1
- 2) For line to line coupling mode, provide a 1KV 1.2/50us voltage surge (at open-circuit condition) and 8/20us current surge to EUT selected points.
- 3) At least 5 positive and 5 negative (polarity) tests with a maximum 1/min repetition rate are conducted during test.
- 4) Different phase angles are done individually.
- 5) Repeat procedure 2) to 4) except the open-circuit test voltage change from 1KV to 2KV for line to earth coupling mode test.
- 6) Record the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test.


11.7. Test Result

Test Point	Polarity	Test Level (kV)	Performance Criterion	Observation	Result
L 1 - L 2	+/-	0.5	B	Note <input type="checkbox"/> 1 <input checked="" type="checkbox"/> 2	PASS
L1 - PE	--	--	--	Note <input type="checkbox"/> 1 <input type="checkbox"/> 2	N/A
L2 - PE	--	--	--	Note <input type="checkbox"/> 1 <input type="checkbox"/> 2	N/A
R - Ground	--	--	--	Note <input type="checkbox"/> 1 <input type="checkbox"/> 2	N/A
T - Ground	--	--	--	Note <input type="checkbox"/> 1 <input type="checkbox"/> 2	N/A

NOTE: 1. There was no change compared with initial operation during the test.
2. The loss of function of the EUT during the test and it was recovered by itself operation after the test.

12. INJECTED CURRENTS SUSCEPTIBILITY TEST

12.1. Block Diagram of EUT Test Setup

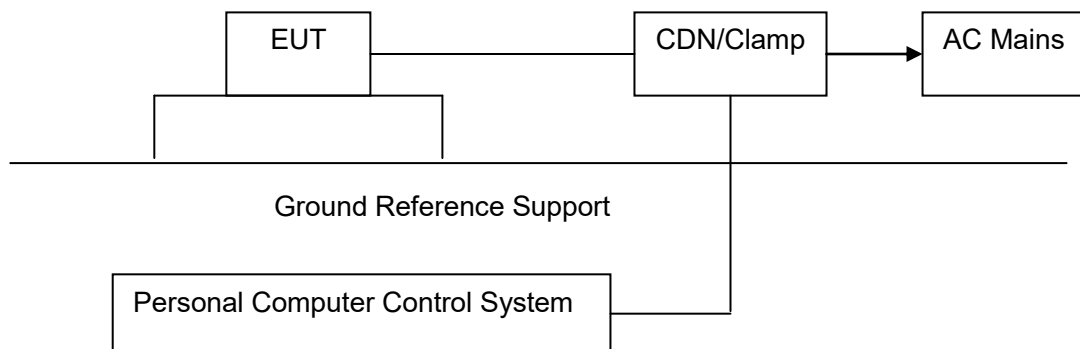

12.2. Test Standard

EN 61547:2009, EN61000-4-6:2014

12.3. Severity Levels and Performance Criterion

Severity Level 2: 3V(rms), 150KHz ~ 80MHz

Severity Level:

Level	Field Strength V
1.	1
2.	3
3.	10
X.	Special

Performance criterion: A

- A. The equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.
- B. After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacturer, when the equipment is

used as intended. The performance level may be replaced by a permissible loss of performance.

During the test, degradation of performance is allowed. However, no change of operating state or stored data is allowed to persist after the test.

If the minimum performance level (or the permissible performance loss) is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

- C. Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions. Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

12.4. EUT Configuration on Test

The configuration of EUT is the same as used in conducted emission test. Please refer to Section 2.8.

12.5. Operating Condition of EUT

Same as conducted emission test, which is listed in Section 2.8 except the test set up replaced as Section 11.1.

12.6. Test Procedure

- 1) Set up the EUT, CDN and test generator as shown on section 11.1
- 2) Let EUT work in test mode and measure.
- 3) The EUT and supporting equipments are placed on an insulating support 0.1m high above a ground reference plane. CDN (coupling and decoupling device) is placed on the ground plane at above 0.1-0.3m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 30 and 50 mm (where possible).
- 4) The disturbance signal described below is injected to EUT through CDN.
- 5) The EUT operates within its operational mode(s) under intended climatic conditions after power on.
- 6) The frequency range is swept from 150KHz to 80MHz using 3V signal level, and with the disturbance signal 80% amplitude modulated with a 1KHz sine wave

- 7) The rate of sweep shall not exceed 1.5×10^{-3} decades/s. Where the frequency is swept incrementally, the step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value.
- 8) Recording the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test.

12.7. Test Result


Frequency Band (MHz)	Field Strength (Vrms)	Injected Position	Injection Method	Performance Criterion	Observation	Result
0.15 ~ 80	3	AC Mains	CDN-M3	A	Note <input checked="" type="checkbox"/> 1 <input type="checkbox"/> 2	PASS
0.15 ~ 80	3	N/A			Note <input type="checkbox"/> 1 <input type="checkbox"/> 2	N/A

NOTE: 1. There was no change compared with initial operation during the test.

2. The loss of function of the EUT during the test and it was recovered by itself operation after the test.

13. MAGNETIC FIELD IMMUNITY TEST

13.1. Block Diagram of Test Setup

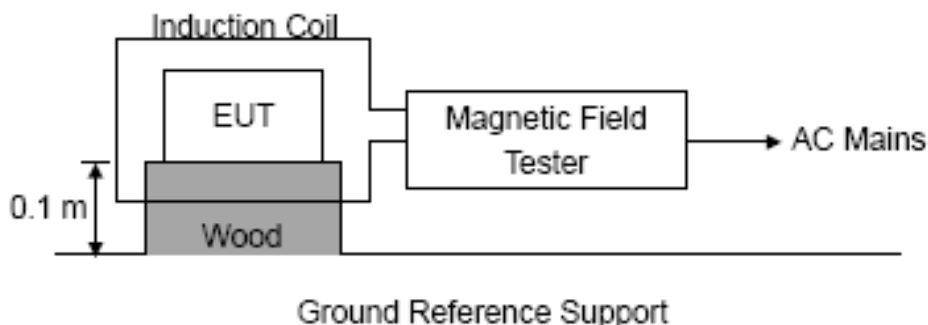

13.2. Test Standard

EN 61547:2009, EN61000-4-8:2010

Severity Level 1 at 1A/m

13.3. Severity Levels and Performance Criterion

13.3.1 Severity level

Level	Magnetic Field Strength A/m
1.	1
2.	3
3.	10
4.	30
5.	100
X.	Special

13.3.2 Performance criterion: B

- A. The equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

- B. After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance.

During the test, degradation of performance is allowed. However, no change of operating state or stored data is allowed to persist after the test.

If the minimum performance level (or the permissible performance loss) is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

- C. Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions. Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

13.4. EUT Configuration on Test

The configuration of EUT is listed in Section 2.9.

13.5. Operating Condition of EUT

Same as conducted emission test, which is listed in Section 2.9 except the test set up replaced as Section 12.1.

13.6. Test Procedure


The EUT shall be subjected to the test magnetic field by using the induction coil of standard dimensions (1m*1m) and shown in Section 10.1. The induction coil shall then be rotated by 90° in order to expose the EUT to the test field with different orientations.

13.7. Test Results

The test item is not applicable.

14. VOLTAGE DIPS AND INTERRUPTIONS TEST

14.1. Block Diagram of EUT Test Setup



14.2. Test Standard

EN 61547:2009, EN61000-4-11:2004

14.3. Severity Levels and Performance Criterion

Severity Level:

Input and Output AC Power Ports.

☒ Voltage Dips.

☒ Voltage Interruptions.

Environmental Phenomena	Test Specification	Units	Performance Criterion
Voltage Dips	70 10	% Reduction period	C
	0 0.5	% Reduction period	B

Performance criterion: C, B

- A. The equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.
- B. After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance.

During the test, degradation of performance is allowed. However, no change of operating state or stored data is allowed to persist after the test.

If the minimum performance level (or the permissible performance loss) is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

- C. Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions. Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

14.4. EUT Configuration on Test

The configuration of EUT is the same as used in conducted emission test. Please refer to Section 2.10.

14.5. Operating Condition of EUT

Same as conducted emission test, which is listed in Section 2.10 except the test set up replaced as Section 13.1.

14.6. Test Procedure

- 1) Set up the EUT and test generator as shown on section 13.1
- 2) The interruption is introduced at selected phase angles with specified duration. There is a 3mins minimum interval between each test event.
- 3) After each test a full functional check is performed before the next test.
- 4) Repeat procedures 2 & 3 for voltage dips, only the level and duration is changed.
- 5) Record any degradation of performance.

14.7. Test Result

Test Power:5Vac, 50Hz				
Voltage (% Reduction)	Duration (Period)	Performance Criterion	Observation	Test Result
0	0.5	<input type="checkbox"/> A <input checked="" type="checkbox"/> B <input type="checkbox"/> C	Note <input type="checkbox"/> 1 <input checked="" type="checkbox"/> 2 <input type="checkbox"/> 3	PASS
70	10	<input type="checkbox"/> A <input type="checkbox"/> B <input checked="" type="checkbox"/> C	Note <input type="checkbox"/> 1 <input type="checkbox"/> 2 <input checked="" type="checkbox"/> 3	PASS

NOTE: 1. There was no change compared with initial operation during and after the test.

No unintentional response was found during the test.

2. The function stopped during the test, but can be recoverable by itself operation after the test.


3. The function stopped during the test, but can be recoverable manually after the test.

15. EUT PHOTOGRAPHS

EUT Photo 1



EUT Photo 2

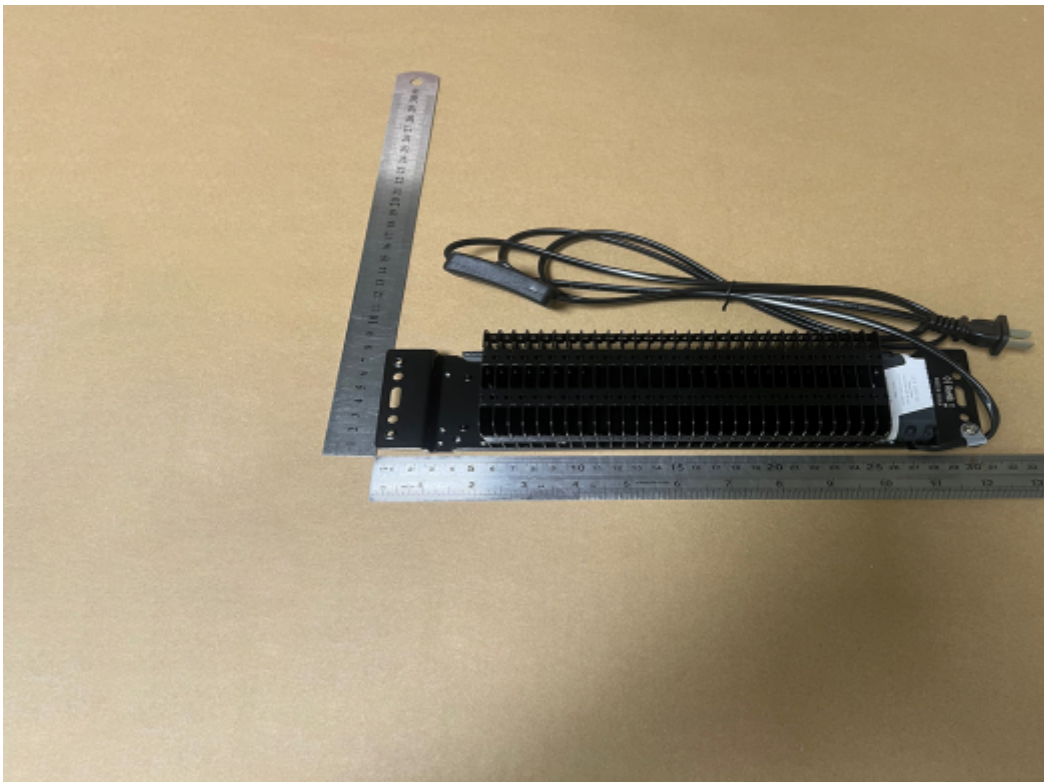EUT Photo 3

***** END OF REPORT *****